

RPR Insul-Mate® Flat Sheet and Roll Jacketing

Aluminum Bare - Smooth - 3/16" corrugated (standard and Rib-Cor*)-stucco embossed. Rolls and flat sheets in 36" and 48" widths. Rolls are standard 100' lengths, with other lengths available upon request. Rolls and sheets are supplied with heat laminated polykraft or Poly-Surlyn** moisture barrier. Thicknesses: .006", .010", .016", .020", .024", .032", .040", .050". Corrugated not available in all thicknesses and widths - inquire.

Aluminum Coated - Smooth - 3/16" corrugated (standard and Rib-Cor)-stucco embossed. Pre-coated with a thermoset acrylic, polyester, epoxy or Kynar 500 paint in a variety of standard colors. DuPont Tedlar*** PVF film is available as a corrosion resistant laminate. Rolls and flat sheets are 36" wide. Rolls are standard 100' lengths, with other lengths available upon request. Rolls and sheets are supplied with heat laminated polykraft or Poly-Surlyn moisture barrier. Thicknesses: .016", .020", .024", .032", .040", .050". Corrugated not available in all thicknesses - inquire.

Stainless Steel - Type 304 and 316 - Smooth - 3/16" corrugated (standard and Rib-Cor)-stucco embossed. Rolls and flat sheets are 36" or 48" wide. Rolls are standard 50' lengths. Rolls and sheets are supplied with heat laminated polykraft or Poly-Surlyn moisture barrier. Thicknesses: .010", .016", .020", .024", .032". Corrugated not available in all thicknesses and widths - Inquire.

Galvanized Steel - Smooth-stucco embossed, hot dipped G90 zinc coated steel. Rolls and flat sheets in 36" and 48" widths. Rolls are standard 50' lengths. Rolls and sheets are supplied with heat laminated polykraft or Poly-Surlyn moisture barrier. Thicknesses: .016", .020", .024". (other thicknesses special inquiry)



AZ-60 Galvalume**** - Smooth-stucco embossed. Rolls and flat sheets are 36" wide. Rolls are standard 50' lengths. Rolls and sheets are supplied with heat laminated polykraft or Poly-Surlyn moisture barrier. Thicknesses: .016". (other thicknesses and widths special inquiry.)

*Rib-Cor Roll jacketing features circumferential 3/16" corrugations instead of traditional longitudinal corrugations. Thickness: Aluminum .016", .020", .024". Stainless Steel .010", .016". Widths: 36" wide only.

**Surlyn - A DuPont trademark

***Tedlar - A DuPont trademark


**** Galvalume - A BIEC International, Inc. trademark

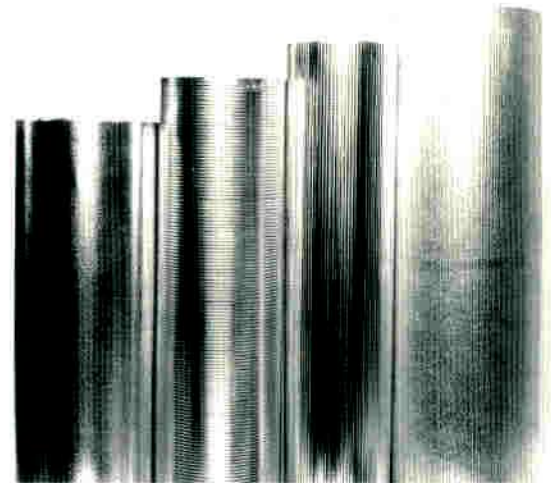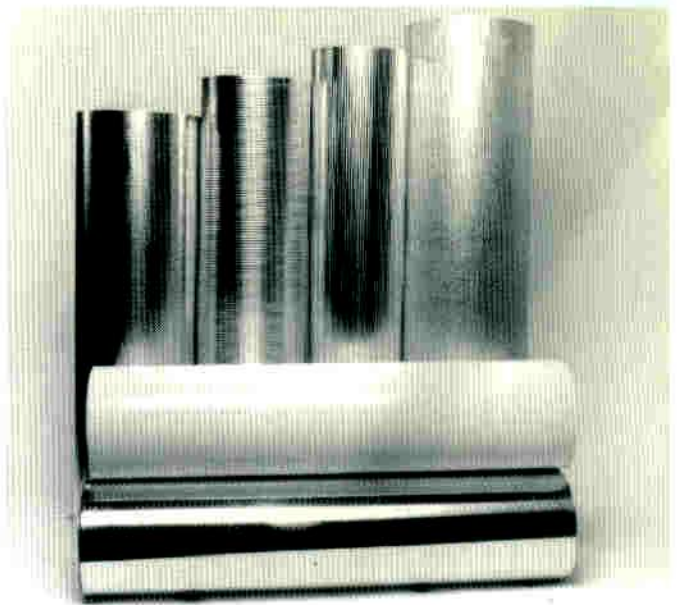

RPR Insul-Mate® 2 Piece Aluminum and Stainless Steel Elbow Covers.

Insul-Mate aluminum elbow covers are formed from .024" thick, 1100 alloy, 0-temper aluminum. The aluminum is coated with a baked on epoxy paint on the inside to resist electrolytic decomposition and a clear acrylic paint on the outside to resist oxidation. The elbow covers are manufactured to ASTM C-450 specifications and fit 90 degree and 45 degree insulated ells ranging from 1/2" to 12" nominal iron pipe size. Insul-Mate aluminum elbow covers are available in smooth and stucco embossed finish. Painted elbow covers are available by special order to match prepainted line jacketing.

Insul-Mate stainless steel elbow covers are formed from .016" thick, T304 and T316 stainless steel. The elbow covers are manufactured to ASTM C-450 specifications and fit 90 degree and 45 degree insulated ells ranging from 1/2" to 6" nominal iron pipe size. Insul-Mate stainless steel elbow covers are available in smooth finish only.

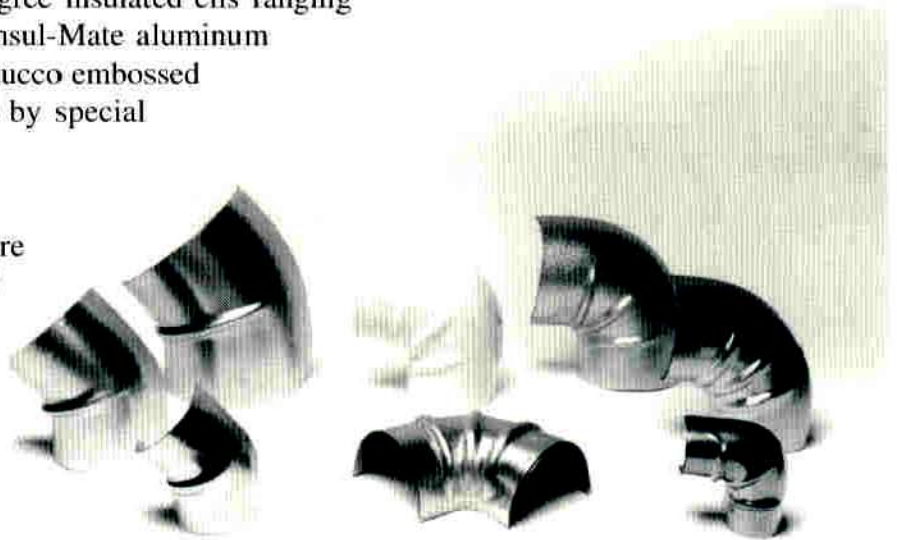

RPR Insul-Mate® Prefabricated Fitting Covers.

Aluminum Gore Elbows - 90° and 45° for pipe sizes 8" to 30", insulation thickness 1" to 5". STAINLESS STEEL, GALVANIZED AND COLOR COATED GORES also available upon request.

Aluminum Tee Covers - for pipe sizes 1/2" to 24", insulation thickness 1" to 4". STAINLESS STEEL and GALVANIZED TEES also available upon request.

Aluminum Flange Covers - for pipe sizes 1" to 24", insulation thickness 1" to 4". STAINLESS STEEL and GALVANIZED FLANGES also available upon request.

Aluminum End Caps - for pipe sizes 1/2" to 24", insulation thickness 1" to 4". STAINLESS STEEL and GALVANIZED END CAPS also available upon request.

Aluminum Bevelled Collars - for pipe sizes 1/2" to 24", insulation thickness 1" to 4". STAINLESS STEEL and GALVANIZED BEVELLED COLLARS also available upon request.

